

1A Nozzles



Automatic shut-off nozzle with metal handguard for full-service and self-service stations.

- 1A nozzle shuts off when the gas tank is full.
- Aluminum reinforced spout bushing keeps the spout tip round and acts as a captive fastener to prevent tip-end sensor damage.
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- *StreamShaper*® reduces turbulence for straighter fuel flow and less splash back spillage.
- Comes standard with smooth full grip guard.



New Unleaded Nozzles with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
696104N [^]	with Three Notch Hold Open Clip	3.3 (1.4)
696108	without Hold Open Clip	3.3 (1.4)
696159N [^]	with Three Notch Hold Open Clip, Full Grip Guard and Reducer Bushing	3.3 (1.4)
696164N [^]	with Three Notch Hold Open Clip and Waffle Splash Guard	3.3 (1.4)
696172N [^]	with Three Notch Hold Open Clip, Waffle Splash Guard and Reducer Bushing	3.3 (1.4)

[^] NOT LISTED

New Unleaded Nozzles with BSPP

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
696116N [^]	with Three Notch Hold Open Clip	3.4 (1.5)
696120	without Hold Open Clip	3.4 (1.5)

[^] NOT LISTED

New Light Duty Diesel Nozzles with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
696103N [^]	with Three Notch Hold Open Clip	3.4 (1.5)
696107	without Hold Open Clip	3.4 (1.5)
696161N [^]	with Three Notch Hold Open Clip and Reducer Bushing	3.4 (1.5)
696163N [^]	with Three Notch Hold Open Clip and Waffle Splash Guard	3.4 (1.5)
696173N [^]	with Three Notch Hold Open Clip, Waffle Splash Guard and Reducer Bushing	3.4 (1.5)
6961134	without Hold Open Clip and Full Grip Guard	3.4 (1.5)
1411303N [^]	with Two Notch Hold Open Clip, EZ Lever and Full Grip Guard	3.4 (1.5)

[^] NOT LISTED


New Light Duty Diesel Nozzles with BSPP

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
696115N [^]	with Three Notch Hold Open Clip	3.4 (1.5)
696119	without Hold Open Clip	3.4 (1.5)

[^] NOT LISTED

Construction

Body	One piece die cast aluminum
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon®
Lever	One piece contoured steel with hard plastic cover
Inlet	1" / 25.4 mm NPT and BSPP

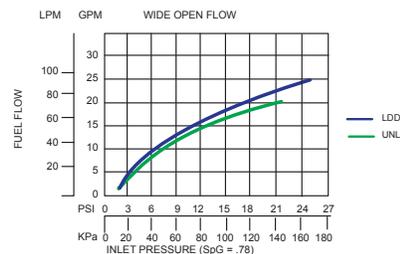

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov